


MV-20


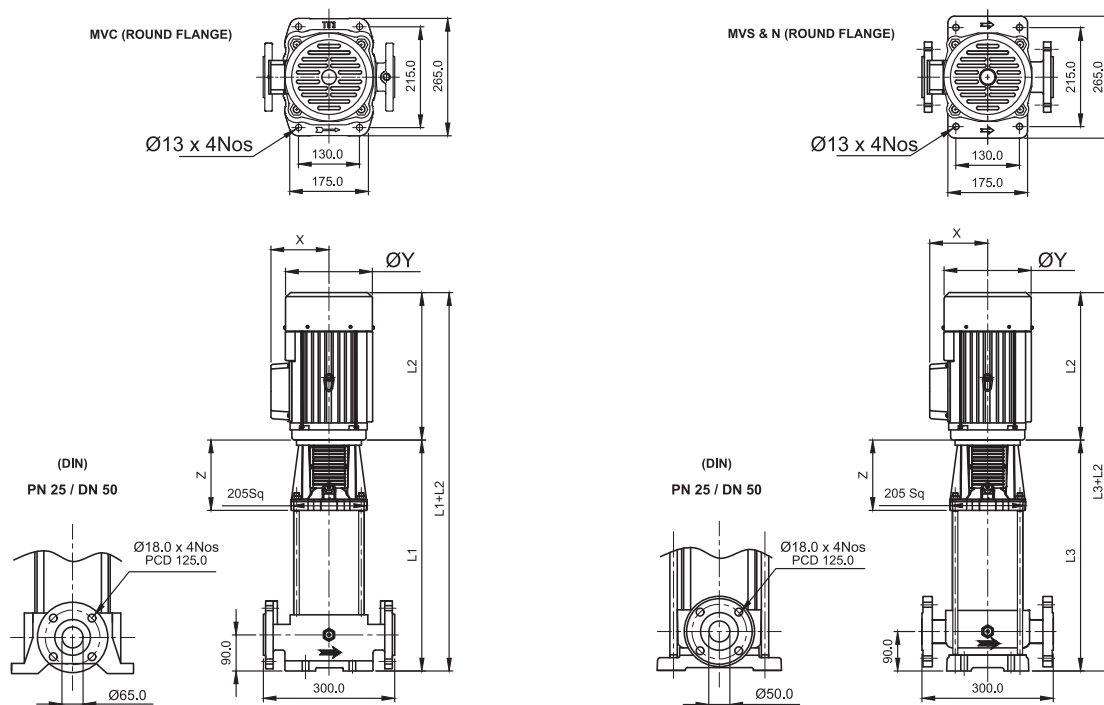


PUMP MODEL	MOTOR POWER		DIMENSIONS IN mm (APPROX)								APPROX NETT WEIGHT WITHOUT PACKING IN kg			
	kW	HP	L1	L3	L2		X		ØY	Z	PUMP		MOTOR	
			MVC (R)	MVS & N (R)	1Ph	3Ph	1Ph	3Ph			MVC (R)	MVS & N (R)	1Ph	3Ph
MVS-20/01	1.1	1.5	348	343	254	274	137.5	111	139	173	38	33	10.5	11.5
MVS-20/02	2.2	3	407	402	303	303	150	123.5	176	187	39	34	17.5	16
MVS-20/03	4	5.5	455	447	-	342.5	-	141.5	197	190	40	35	-	23
MVS-20/04	5.5	7.5	529	521	-	379	-	189	257	216	45	40	-	40.5
MVS-20/05	5.5	7.5	574	566	-	379	-	189	257	216	46	41	-	40.5
MVS-20/06	7.5	10	619	611	-	419	-	189	257	216	47	42	-	44
MVS-20/07	7.5	10	664	656	-	419	-	189	257	216	48	43	-	44
MVS-20/08	11	15	798	790	-	500.5	-	261	314	305	67	62	-	107
MVS-20/10	11	15	932	924	-	500.5	-	261	314	305	69	64	-	107
MVS-20/12	15	20	1066	1058	-	500.5	-	261	314	305	71	66	-	117
MVS-20/14	15	20	1200	1192	-	500.5	-	261	314	305	73	68	-	117
MVS-20/17	18.5	25	1334	1326	-	500.5	-	261	314	305	76	71	-	134

NOMINAL FLOW : 20m³/h

PERFORMANCE CURVES

MV-20

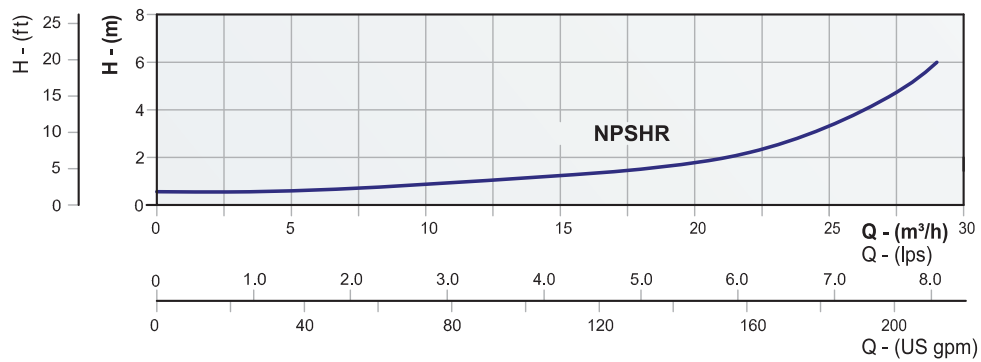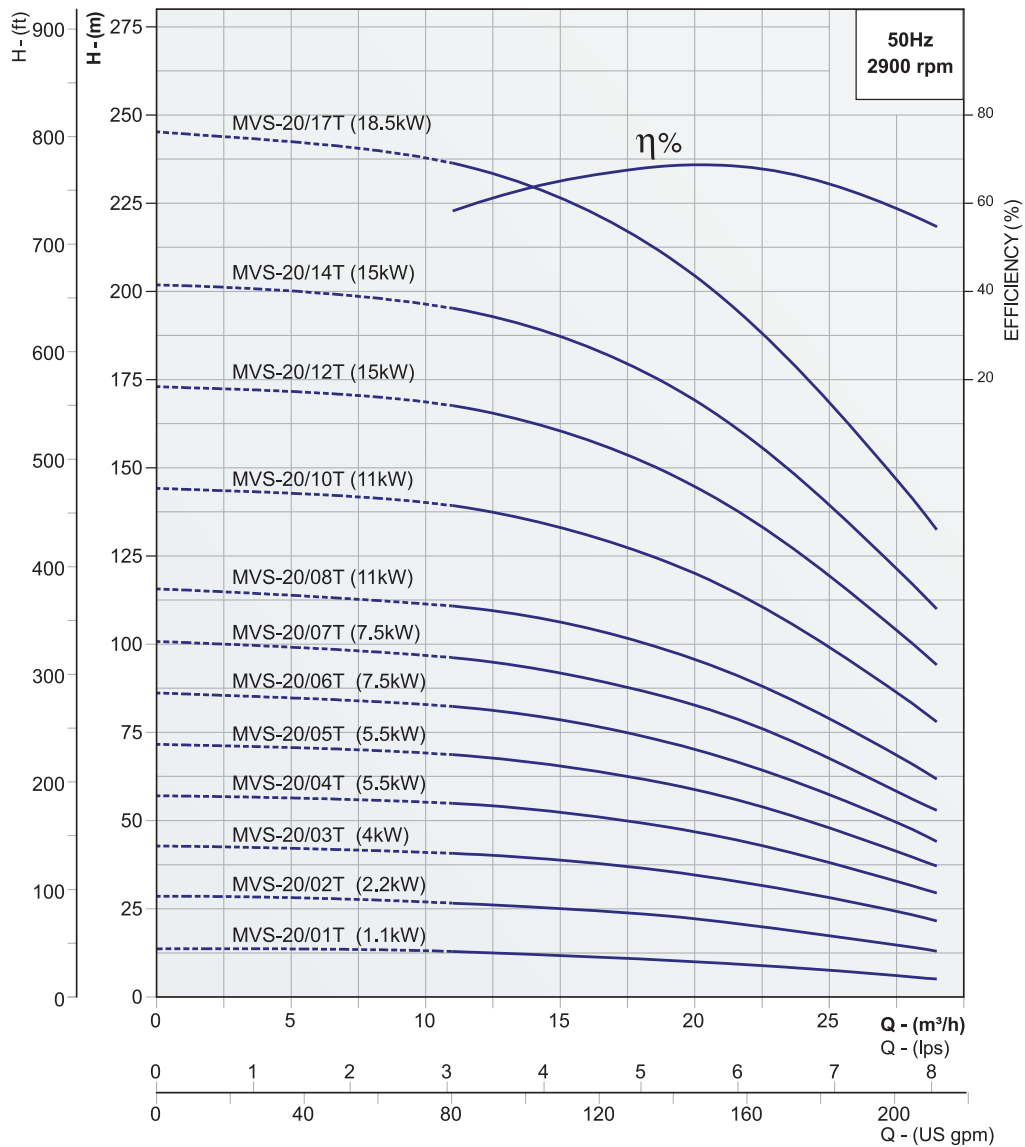

Replace the 3rd digit in model name as "C" for Cast Iron pump base & pump head models and "N" for SS 316 construction.
 The given performance is same for Type - C, S & N
 In view of the continuous developments the Information / Descriptions / Specifications / Illustrations are subject to change without notice.